



Fabrication of Lightweight and Low Cost Shields for Gamma Ray Attenuation

Eman Hammod Abdullah¹, Ahmed Hashim^{2*}, Huda Abdul Jalil Hussien³, Majeed Ali Habeeb⁴

Abstract

Films of biopolymer (PVA) doped with titanium nanoparticles (Ti NPs) have been prepared with several ratios of PVA and Ti NPs to apply for gamma ray shielding with low unit cost, flexible, lightweight, and high corrosion resistance. The prepared nanocomposites tested for gamma ray shielding. The experimental results showed the PVA/ Ti nanocomposites films have high coefficients of attenuation for gamma ray.

Key Words: Gamma Ray, Attenuation Coefficients, Radiation Shielding, Nanocomposites.

DOI Number: 10.14704/nq.2021.19.11.NQ21186

NeuroQuantology 2021; 19(11):158-160

Introduction

Radiation phenomenon can be defined as the energy that arrives from the source then transfer during the space and can be able to make a way into different matter. The radiation may be divided based on its potential to ionize material into two major classes: nonionizing and ionizing radiations (Chaitali et al, 2021). In medical fields, it has been some years the high energy gamma-rays and X-rays were being employed in the radiotherapy to treat and control cancerous tumors (Kazemi et al, 2019) Nowadays, shielding of radiation is especially crucial section in the programs of radiation protection. Typically, concrete is the mainly general and normally employed matter to the radiation shielding in mainly facilities like hospitals. The huge available quantity and cost efficiency of concrete were its major advantages to use as the shielding material. Though, it has several disadvantages like cracks may happen after long period of time of exposure to radiation and the difficult for transport. The synthetic polymers may be employed to manufacture novel materials may make radiation shielding. Furthermore, their

additional advantages like durability, low industrialized cost, and high chemical and thermal stability are amid the preferential traits and quality used for greater shielding (Mahmoud et al, 2020). 158 Moreover, the advantages of polymer materials, like, mold ability, high flexibility, strength are important when combined with the excellent properties of inorganic substances, such as heat strength, thermal stability, chemical resistance, and high strength, when creating composite materials. The nanofillers can be utilized in a widespread range of usages, such as, tissue engineering, wound dressing, manufacturing sensors, filters, catalysis, scaffolds, and their mechanical, electrical properties, magnetic, thermal and optical properties can be improved by incorporating inorganic and organic materials to the structures (Gamal et al, 2015). Biomedical applications will benefit from the production of polymer composites using a matrix of polymer that has high tensile strength and is non-toxic (Kapil et al, 2019). The current work aims to synthesize of PVA/Ti nano-system for radiation shielding.

Corresponding author: Ahmed Hashim

Address: ¹Department of Physics, College of Education for Pure Sciences, University of Babylon, Iraq; ^{2*}Department of Physics, College of Education for Pure Sciences, University of Babylon, Iraq; ³Ministry of Education / General Directorate of Kirkuk Education, Iraq; ⁴Department of Physics, College of Education for Pure Sciences, University of Babylon, Iraq.

^{2*}E-mail: ahmed_taay@yahoo.com

Relevant conflicts of interest/financial disclosures: The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

Received: 17 September 2021 **Accepted:** 24 October 2021



Experimental Part

Films of PVA/Ti nanocomposites were fabricated from titanium nanoparticles as additive and polyvinyl alcohol as matrix using the casting method. 1gm of PVA was dissolved in 20 ml of distilled water. The magnetic stirrer used to mix the materials for 1 hour. The Ti NPs added to the PVA with ratios are (2.5, 5 and 7.5) wt.%. The testing of PVA/Ti films as shield for Gamma ray were investigated. The transmitted gamma ray (N) during the films are measured by the Geiger counter.

Results and Discussion

Figures 1-4 show the thickness effect of pure and each ratio of Ti NPs on transmitted gamma ray during the sample. The ratio of transmission radiation is reduced with the rise in thickness and Ti NPs ratio which due to the rise of the radiation attenuation. (Khalid et al, 2019; Ahmed et al, 2018). Figure 5 represents the Ti NPs content effect on transmitted gamma ray for PVA/Ti samples. As shown in the figure 2, the N/N_0 values are reduced with the increase in Ti NPs ratio, this behavior related to the gamma radiation absorption or reflection by nanocomposites shielding materials (Hassan et al, 2018; Ahmed et al, 2018).

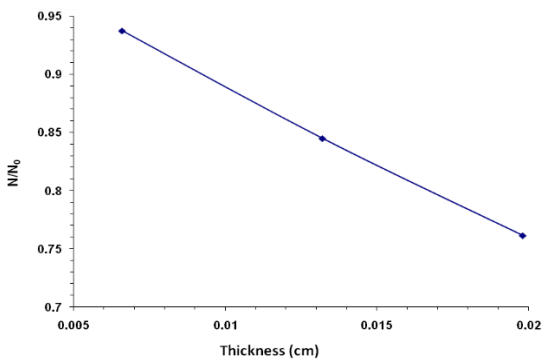


Figure 1. N/N_0 variation with thickness for pure polymer

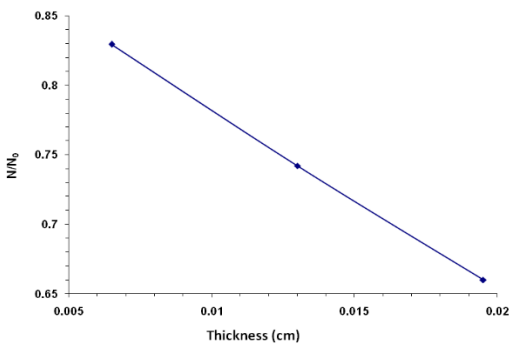


Figure 2. N/N_0 Variation with thickness for 2.5 wt.% Ti NPs

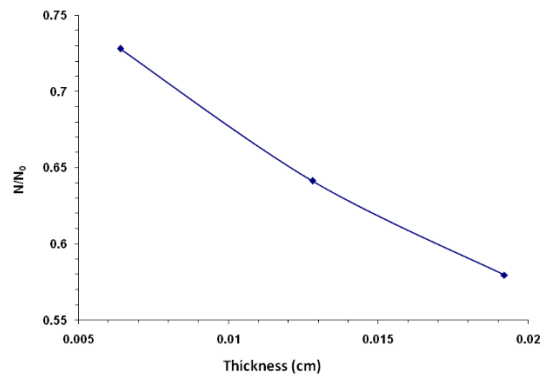


Figure 3. N/N_0 Variation with thickness for 5 wt.% Ti NPs

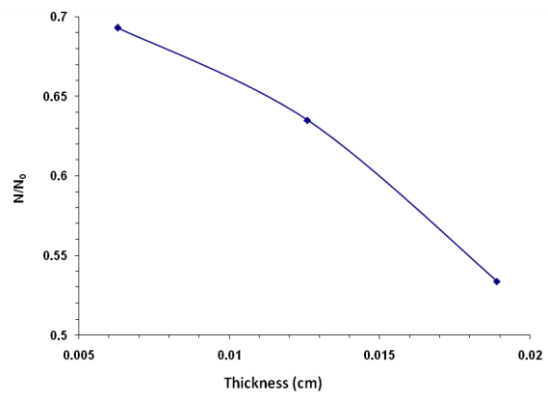


Figure 4. N/N_0 Variation with thickness for 7.5 wt.% Ti NPs

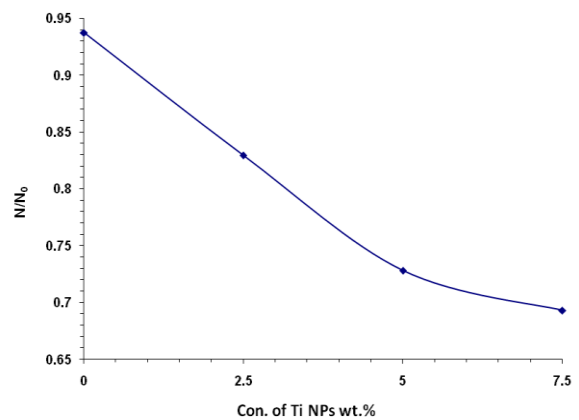


Figure 5. N/N_0 Variation with Ti NPs content

Conclusions

1. The transmitted ray ratio was reduced with the rise in thickness and Ti NPs content.
2. The attenuation coefficients were increased with the rise in Ti NPs ratio.
3. The prepared materials have low cost, lightweight and flexible.



References

- Hashim A, Hamad ZS. Novel of (niobium carbide-biopolymer blend) nanocomposites: characterization for bioenvironmental applications. *Journal of Bionanoscience* 2018; 12(4): 488-493.
- Hashim A, Hamad ZS. Synthesis, characterization and nanobiological application of (biodegradable polymers-titanium nitride) nanocomposites. *Journal of Bionanoscience* 2018; 12(4): 504-507.
- More CV, Alsayed Z, Badawi MS, Thabet AA, Pawar PP. Polymeric composite materials for radiation shielding: a review. *Environmental Chemistry Letters* 2021: 1-34.
- Nasr GM, Abd El-Haleem AS, Klingner A, Alnozahy AM, Mourad MH. The DC electrical properties of polyvinyl alcohol/multi-walled carbon nanotube composites. *Journal of Multidisciplinary Engineering Science and Technology*, 2015; 2(5): 884-889.
- Hassan D, Hashim A. Preparation and Studying the Structural and Optical Properties of (Poly-Methyl Methacrylate-Lead Oxide) Nanocomposites for Bioenvironmental Applications. *Journal of Bionanoscience* 2018; 12(3): 346-349.
- Kazemi F, Malekie S. A Monte Carlo study on the shielding properties of a novel polyvinyl alcohol (PVA)/WO₃ composite, against gamma rays, using the MCNPX code. *Journal of Biomedical Physics & Engineering* 2019; 9(4): 465-472.
- Gulati K, Lal S, Diwan PK, Arora S. Investigation of thermal, mechanical, morphological and optical properties of polyvinyl alcohol films reinforced with buddha coconut (sterculia alata) leaf fiber. *International Journal of Applied Engineering Research* 2019; 14(1): 170-179.
- Al-Attiyah KH, Hashim A, Obaid SF. Fabrication of novel (carboxy methyl cellulose-polyvinylpyrrolidone-polyvinyl alcohol)/lead oxide nanoparticles: structural and optical properties for gamma rays shielding applications. *International Journal of Plastics Technology* 2019; 23(1): 39-45.
- Mahmoud KA, Lacomme E, Sayyed MI, Özpölat ÖF, Tashlykov, OL. Investigation of the gamma ray shielding properties for polyvinyl chloride reinforced with chalcocite and hematite minerals. *Helvion* 2020; 6(3).
- Abdulrazzak FH, Abass AM, Alkaim AF, Hussein FH. Comparison between chemical vapor deposition and flame fragments deposition techniques for synthesizing carbon nanotubes. *NeuroQuantology* 2020; 18(4): 5-10.

